


## Snow sweeper

- City Ranger 2260

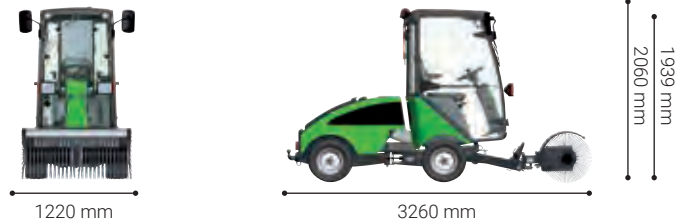

### Standard equipment:

- Trapeze mounting** The trapeze-mounting ensures the snow sweeper remains clear of the wheels of the utility machine at all times, whatever the angle. The snow sweeper automatically turns with the utility machine - always sweeping in front of the wheels of the utility machine.
- Reverse rotation function** Reversing the brush rotation ensures that the operator can sweep material when reversing out of an alley or parking spot, which ensures an excellent result.
- Adjustable speed** The rotation speed can easily be adjusted from the cabin to match the need for sweeping.
- Support stand** A support stand with a wheel is build in to the snow sweeper for easy storage.
- Adjustable weight distribution** For optimum functionality as well as minimum wear of the attachment.

### Extra equipment (options):

- Extended brush guard** Attaching a brush guard extends the snow sweeper cover, which minimises the snow whirling up on the front wind-screen. Furthermore, the guard makes it easier to control the direction of swept sand and gravel during summer operation. This can be retrofitted on existing snow sweepers as well.
- Anti-corrosion treatment** The anti-corrosion treatment will extend the life of the attachment.

### Technical specifications

#### Dimensions

Length	mm	3260
Width	mm	1220
Height with cabin / roll bar (ROPS)	mm	1939 / 2060

#### Storage dimensions

Length	mm	820
Width	mm	1220
Height	mm	650

#### Weight

Weight (snow sweeper)	kg	104
-----------------------	----	-----

#### Performance

Clearing width - straight	mm	1220
Clearing width - angled 25°	mm	1150
Ground clearance below brush	mm	420
Brush diameter Ø	mm	550
Operating speed	km/h	1-15
Theoretical sweeping capacity	m <sup>2</sup> /h	18300
Handling snow depth up to	mm	150
Brush speed	rpm	0-240
Turning angle		25°

CE certified according to EU directive

